

Europäisches Patentamt  
European Patent Office  
Office européen des brevets



(11) **EP 1 347 463 A2**

(12) **EUROPEAN PATENT APPLICATION**

(43) Date of publication:  
24.09.2003 Bulletin 2003/39

(51) Int Cl.7: **H01B 1/12, C12Q 1/68,  
G01N 33/53**

(21) Application number: **03004957.1**

(22) Date of filing: **10.03.2003**

(84) Designated Contracting States:  
**AT BE BG CH CY CZ DE DK EE ES FI FR GB GR  
HU IE IT LI LU MC NL PT RO SE SI SK TR**  
Designated Extension States:  
**AL LT LV MK RO**

- Choi, Young  
Kiheung-eub, Yongin-city, Kyungki-do (KR)
- Han, Jung-im  
Seoul (KR)
- Lim, Geun-bae, 1053-2 Youngtong-dong  
Paldal-gu, Suwon-city, Kyungki-do (KR)

(30) Priority: **09.03.2002 KR 2002012729  
07.02.2003 KR 2003007757**


(71) Applicant: **SAMSUNG ELECTRONICS CO., LTD.**  
**Suwon-City, Kyungki-do (KR)**

(74) Representative: **Grünecker, Kinkeldey,  
Stockmair & Schwanhäusser Anwaltssozietät  
Maximilianstrasse 58  
80538 München (DE)**

(72) Inventors:  
• Cha, Jun-hoe  
Yongin-city, Kyungki-do (KR)


(54) **Novel electrically conductive polymer, sensor using the same, and method for detecting target molecule using the sensor**

(57) A novel electrically conductive polymer, a sensor using the electrically conductive polymer, and a method for detecting a target molecule that hybridizes to a probe, using the sensor, are provided. The electrically conductive polymer has the following formula:

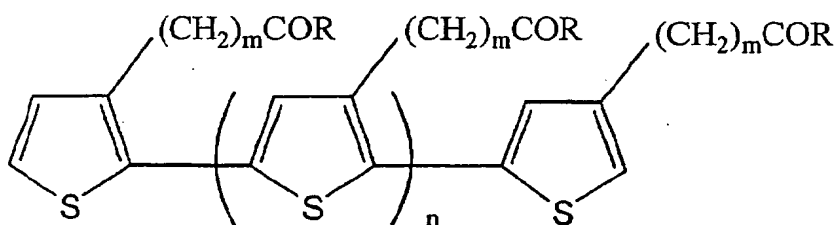

where m is 1, 2, or 3; R is a hydroxysuccinimidyl group, a hydroxyphthalimidyl group, or a pentafluorophenyl group; and n is zero or an integer.

FIG. 1

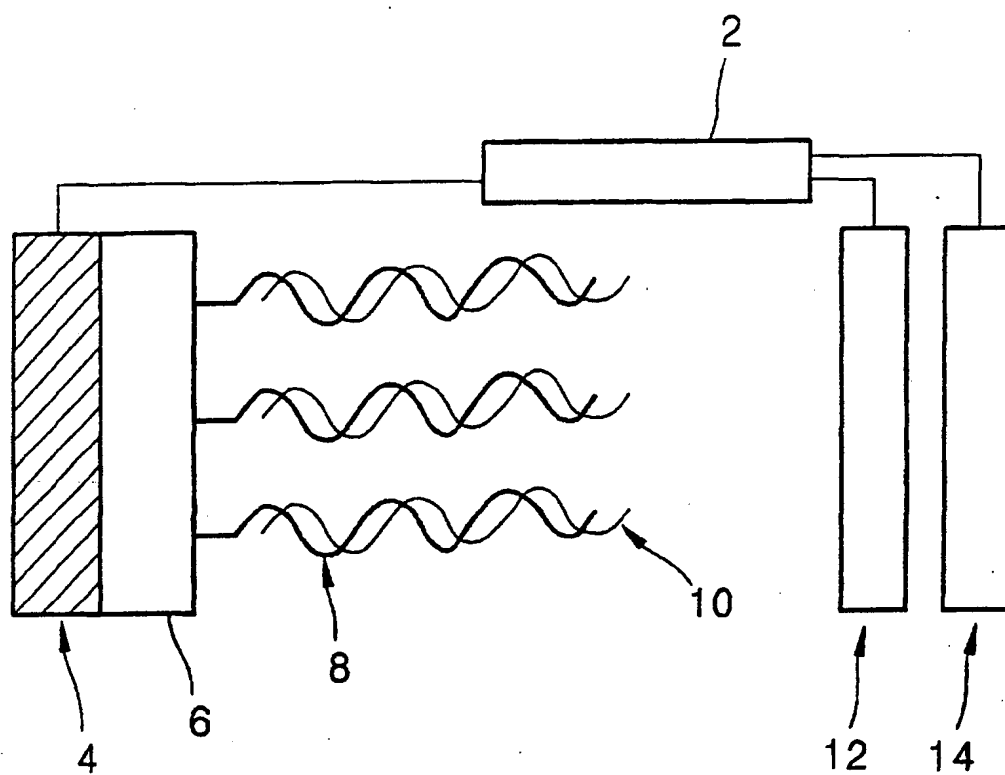

## Description

## BACKGROUND OF THE INVENTION

## 1. Field of the Invention

[0001] The present invention relates to a novel electrically conductive polymer, a sensor having an electrode coated with the electrically conductive polymer, and a method for detecting a target molecule using the sensor.

## 2. Description of the Related Art

[0002] There have been many studies on the development of biomolecule detecting sensors based on the electrochemical principles. One advantage of using the electrochemical principles lies in that sensors can be miniaturized. Accordingly, there have been great advances in research on electrochemical sensors, such as ionic sensors, gas sensors, biosensors, etc. In the fields of genomics and proteomics, it is very important to monitor information on the hybridization of DNA, among other biological molecules, and to monitor conformational changes of proteins. To this end, there have been developed sensors using organic materials, such as intercalators having electrochemical activities, and using electrically conductive polymers. In particular, intercalator-based sensors are ready to be released on the market as a result of extensive research thereon.

[0003] In conductive polymer sensors, only a few representative monomers capable of being polymerized on electrodes are available, and it is difficult to control the physical properties of polymers. As a result, research thereon has been relatively slow. Representative materials for conductive polymer sensors include pyrroles, thiophenes, anilines, and the like. However, because of a limitation that anilines are effective only in acidic conditions, pyrroles and thiophenes have been the main focus of research.

[0004] However, pyrroles cannot be used for a long duration due to their small redox potential (U.S. Patent No. 6,201,086). Thiophenes have a higher redox potential but are more hydrophobic than pyrroles, so they are unsuitable for biomolecule dispersion systems in water (Bauerle P. and Emge A., Adv. Materi., 3:324 (1998)).

## SUMMARY OF THE INVENTION

[0005] The present invention provides a novel electrically conductive polymer.


[0006] The present invention also provides novel monomer compounds capable of being polymerized into the electrically conductive polymer.

[0007] The present invention also provides an electrode coated with the electrically conductive polymer.

[0008] The present invention also provides a sensor having an electrode coated with the electrically conductive polymer.


[0009] The present invention also provides a method for detecting a target molecule using the sensor.

[0010] According to an aspect of the present invention, there is provided an electrically conductive polymer having formula (I) below:

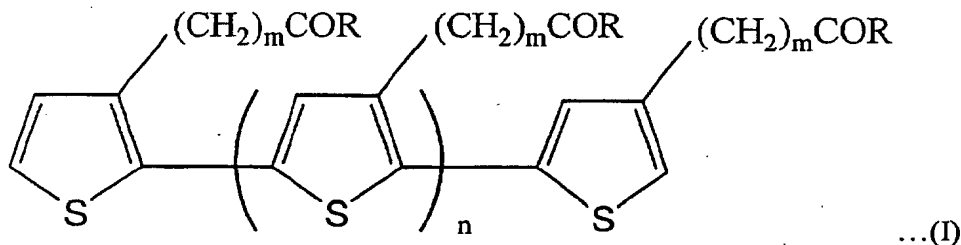

where  $m$  is 1, 2, or 3;  $R$  is a hydroxysuccinimidyl group, a hydroxyphthalimidyl group, or a pentafluorophenyl group; and  $n$  is zero or an integer.

[0011] An electrically conductive polymer according to the present invention may have formula (II) below:

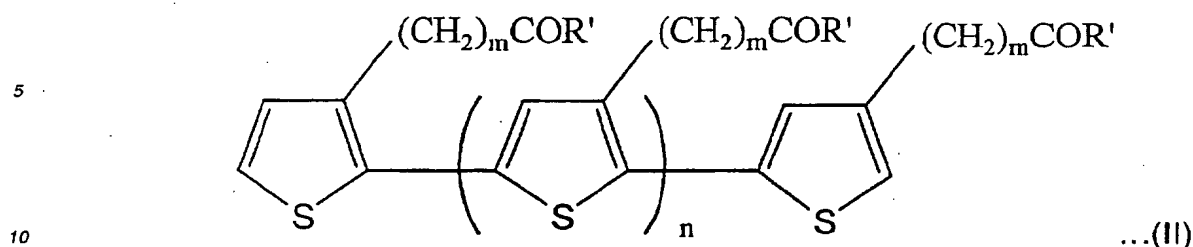

where  $m$  is 1, 2, or 3;  $R'$  is a hydroxysuccinimidyl group, a hydroxyphthalimidyl group, a pentafluorophenyl group, or a probe group, wherein at least one  $R'$  is a probe group; and  $n$  is zero or an integer.

**[0012]** According to another aspect of the present invention, there is provided a monomer used for the synthesis of any electrically conductive polymer according to the present invention described above, being N-hydroxyphthalimidyl 3-thiophenyl acetate or 3-pentafluorophenyl 3-thiophenyl acetate.

**[0013]** According to another aspect of the present invention, there is provided a method for detecting a target molecule, comprising: (a) providing the electrically conductive polymer having formula (I) above on a substrate through electrical polymerization; (b) immobilizing a probe to the surface of the electrically conductive polymer; (c) contacting a sample containing a target molecule, which is capable of specifically reacting with the probe, to hybridize with the probe; and (d) detecting the target molecule by measuring a voltage or current variation in the electrically conductive polymer.

**[0014]** Another method for detecting a target molecule according to the present invention comprises: (a) providing the electrically conductive polymer of formula (II) above on a substrate through electrical polymerization; (b) contacting a sample containing a target molecule, which is capable of specifically reacting with the probe, to hybridize with the probe bonded to the electrically conductive polymer; and (c) detecting the target molecule by measuring a voltage or current variation in the electrically conductive polymer.

#### BRIEF DESCRIPTION OF THE DRAWINGS

**[0015]** The above and other features and advantages of the present invention will become more apparent by describing in detail exemplary embodiments thereof with reference to the attached drawings in which:

FIG. 1 illustrates an embodiment of a sensor employing an electrode coated with an electrically conductive polymer according to the present invention;

FIG. 2 shows another embodiment of a sensor using an electrically conductive polymer according to the present invention;

FIG. 3 is a graph illustrating an example of polymerization using chronopotentiometry for an electrically conductive polymer according to the present invention;

FIG. 4 is a scanning electron microscopic photograph of an electrically conductive polymer layer according to the present invention polymerized by chronopotentiometry;

FIG. 5 is a cyclic voltammogram of an electrically conductive polymer layer according to the present invention polymerized by chronopotentiometry;

FIG. 6A is a cyclic voltammogram at three different scanning rates for an electrically conductive polymer layer according to the present invention polymerized by chronopotentiometry, and FIG. 6B is a graph of correlation between scanning rate versus and peak current, which was obtained based on the cyclic voltammogram of FIG. 6A;

FIG. 7 illustrates the hybridization of an immobilized probe DNA and a complementary target DNA;


FIG. 8 is a cyclic voltammogram for two spots on an electrode coated with an electrically conductive polymer according to the present invention, one spot for a probe DNA immobilized on the electrode and the other spot for a target DNA hybridized to the probe DNA;

FIG. 9 is a graph of correlation between target DNA concentration and peak current, which is measured from a cyclic voltammogram of target DNA hybridized at different concentrations to probe DNA immobilized on an electrode coated with an electrically conductive polymer according to the present invention; and

FIG. 10 is a graph showing the difference in peak current between a perfect match target DNA and single base mismatch target DNAs after hybridization to a probe DNA.


## DETAILED DESCRIPTION OF THE INVENTION

**[0016]** An electrically conductive polymer according to the present invention has formula (I) below:

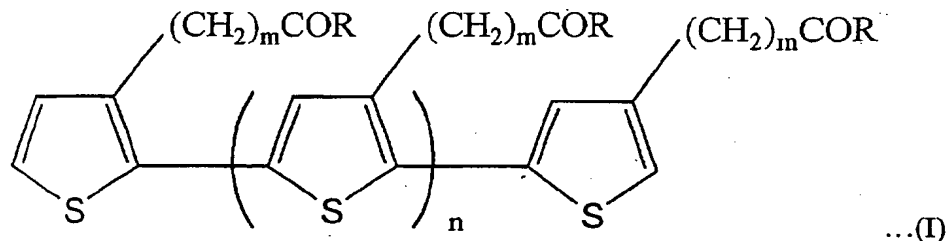

where  $m$  is 1, 2, or 3;  $R$  is a hydroxysuccinimidyl, hydroxyphthalimidyl, or pentafluorophenolyl group; and  $n$  is zero or an integer.

**[0017]** Another electrically conductive polymer according to the present invention has formula (II) below:


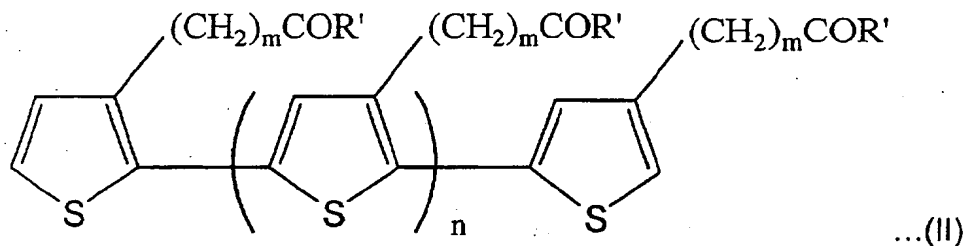


where  $m$  is 1, 2, or 3;  $R'$  is a hydroxysuccinimidyl group, a hydroxyphthalimidyl group, a pentafluorophenolyl group, or a probe group, wherein at least one  $R'$  is a probe group; and  $n$  is zero or an integer.

**[0018]** The term "probe" used throughout the specification means a molecule capable of specifically binding to a target material. Examples of such a probe includes a nucleic acid and a protein, in which a deoxyribonucleic acid (DNA), a ribonucleic acid (RNA), a peptide nucleic acid (PNA), an antibody, an antigen, an enzyme, a cofactor, and a substrate are preferred as the probe.

**[0019]** Electrically conductive polymers according to the present invention may be synthesized from monomers through polymerization by cyclic voltammetry, chronopotentiometry, chronoamperometry, and the like. The electrically conductive polymers according to the present invention have a high redox potential.

**[0020]** The present invention provides monomers capable of forming, through polymerization, an electrically conductive polymer according to the present invention. Preferred examples of such monomers include N-hydroxyphthalimidyl 3-thiophenyl acetate having formula (III) below and pentafluorophenolyl 3-thiophenyl acetate having formula (IV) below.

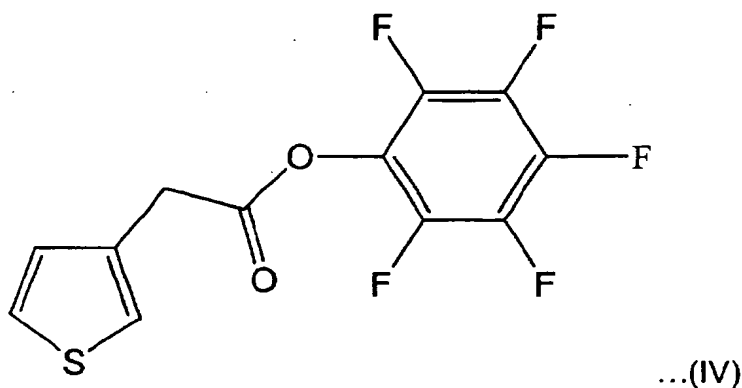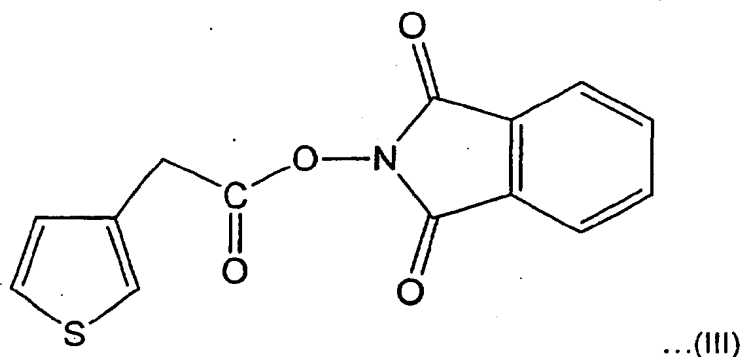

[0021] The present invention provides an electrode coated with an electrically conductive polymer according to the present invention. Any material commonly used in forming electrodes, for example, platinum, may be used for the electrode according to the present invention.

[0022] The present invention provides a sensor employing an electrode coated with an electrically conductive polymer according to the present invention. The sensor according to the present invention includes common sensor constituent elements except for an electrode coated with an electrically conductive polymer according to the present invention. The sensor according to the present invention may include a working electrode, a counter electrode, and a reference electrode, which are commonly used.

[0023] FIG. 1 illustrates an embodiment of a sensor employing an electrode coated with an electrically conductive polymer according to the present invention. Referring to FIG. 1, a sensor according to the present invention includes a working electrode 4 coated with an electrically conductive polymer 6 according to the present invention that is covalently bonded with a probe 8, a counter electrode 12, and a reference electrode 14, and a potentiostat 2 for measuring potential.

[0024] The working electrode 4 coated with the electrically conductive polymer 6 according to the present invention may be manufactured as follows. Initially, a monomer, a kind of thiophene compound having an amine group capable of binding to a probe, is synthesized. Thiophene monomers capable of being electrically polymerized are preferred. The synthesized monomer is subject to polymerization over a substrate and bound with a probe, for example, DNA, thereby resulting in an electrode according to the present invention that is coated with an electrically conductive polymer according to the present invention covalently bonded with a probe. Alternatively, after covalently bonding the probe 8 to a thiophene monomer, the thiophene monomer with the probe 8 may be subject to polymerization over a substrate, thereby resulting in an electrode according to the present invention that is coated with an electrically conductive polymer

according to the present invention covalently bonded with a probe. The electrode manufactured through the above processes is used as the working electrode 4.

[0025] A target molecule 10 of interest in samples can be detected using the above sensor according to the present invention. When a sample containing the target molecule 10 is brought to contact the probe 8 that is immobilized on the working electrode 4 of the sensor, the target molecule 10 hybridizes to the probe 8, as illustrated in FIG. 1, a voltage or current variation from the hybridization reaction is read, so that the target molecule 10 in the sample can be identified.

[0026] Voltage or current variations occurring from hybridization are thought to follow, though not absolutely, the mechanism described below. The electrical current at a particular redox potential depends on the delocalization in the electrically conductive polymer on the substrate. The degree of delocalization in the electrically conductive polymer after a target molecule hybridizes to the probe that is covalently bonded to the electrically conductive polymer according to the present invention is smaller than before the hybridization. Accordingly, when a target metal hybridizes to a probe, the electrical current decreases. In other words, when a double stranded DNA is formed as a result of the hybridization of a DNA probe and a target DNA, the electrical current becomes small. Therefore, a target molecule in a sample can be detected by measuring a decrease in the amount of redox potential that occurs when the target molecule hybridizes to a probe or an increase when not.

[0027] FIG. 2 shows another embodiment of a sensor using an electrically conductive polymer according to the present invention. The sensor of FIG. 2 includes a working electrode 4, a counter electrode 12, and a reference electrode 14. The working electrode 4 is coated with an electrically conductive polymer according to the present invention.

[0028] The present invention provides a method for detecting a target molecule, the method including:

- (a) providing an electrically conductive polymer, a kind of polythiophene, on a substrate through electrical polymerization;
- (b) immobilizing a probe to the surface of the electrically conductive polymer;
- (c) contacting a sample containing a target molecule, which is capable of specifically reacting with the probe, to hybridize with the probe; and
- (d) detecting the target molecule by measuring a voltage or current variation in the electrically conductive polymer.

[0029] The present invention provides another method for detecting a target molecule, the method including:

- (a) providing an electrically conductive polymer, a kind of polythiophene, bonded with a probe on a substrate through electrical polymerization;
- (b) contacting a sample containing a target molecule, which is capable of specifically reacting with the probe, to hybridize with the probe bonded to the electrically conductive polymer; and
- (c) detecting the target molecule by measuring a voltage or current variation in the electrically conductive polymer.


[0030] It is preferable that the conductive substrate be a gold or platinum electrode. Examples of such a probe include, preferably, a DNA, an RNA, a PNA, an antibody, an antigen, an enzyme, a substrate, and a cofactor. Such a target molecule may include any material capable of specifically binding to the probe, preferably, a nucleic acid or a protein.

[0031] Hereinafter, the present invention will be described in greater detail with reference to the following examples. The following examples are for illustrative purposes and are not intended to limit the scope of the invention.

#### Example 1: Synthesis of N-hydroxyphthalimidyl 3-thiophenyl acetate

[0032] N-hydroxyphthalimidyl 3-thiophenyl acetate as a monomer to be used in the synthesis of an electrically conductive polymer according to the present invention was synthesized as follows. One equivalent of 3-thiophenyl acetic acid and 1 equivalent of 3-hydroxyl phthalimide were reacted in chloroform at room temperature in the presence of N, N'-dicyclohexyl carbodiimide (DCC), as shown in a reaction scheme below. The reaction product was purified through recrystallization. The resulting purified compound was confirmed to be N-hydroxyphthalimidyl 3-thiophenyl acetate having formula (III) above by NMR.

$^1\text{H}$  NMR( $\text{CDCl}_3$ ): 7.87(m,  $\text{C}_6\text{H}_4$ , 4H), 7.31(m,  $\text{C}_4\text{H}_3\text{SCH}_2$ , 1H), 7.24(s,  $\text{C}_4\text{H}_3\text{SCH}_2$ , 1H), 7.11(m,  $\text{C}_4\text{H}_3\text{SCH}_2$ , 1H), 4.01 (s,  $\text{C}_4\text{H}_3\text{SCH}_2$ , 2H).

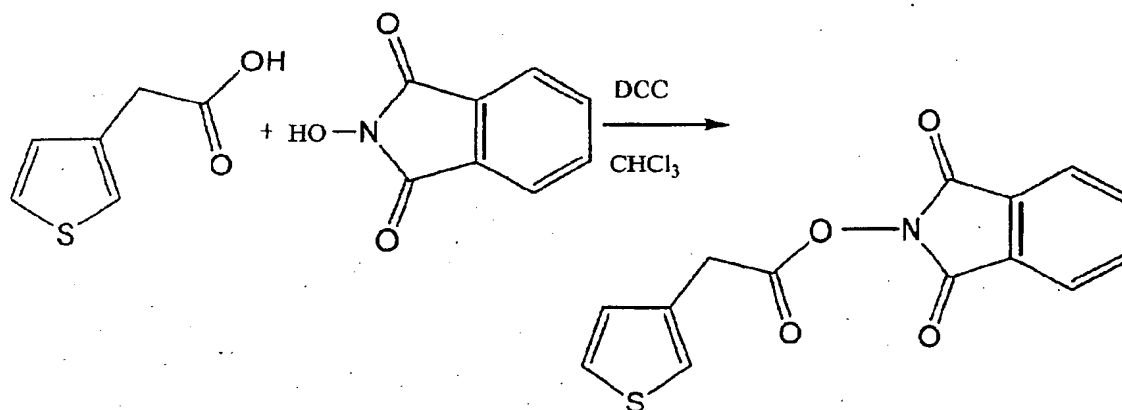

#### Example 2: Synthesis of 3-pentafluorophenyl 3-thiophenyl acetate

**[0033]** 3-pentafluorophenyl 3-thiophenyl acetate as a monomer to be used in the synthesis of an electrically conductive polymer according to the present invention was synthesized as follows. One equivalent of 3-thiophenyl acetic acid and 1 equivalent of pentafluorophenol were reacted in chloroform at room temperature in the presence of DCC. The reaction product was purified through column chromatography on silica gels. The resulting purified compound was confirmed to be 3-pentafluorophenyl 3-thiophenyl acetate having formula (IV) above by NMR.

$^1\text{H NMR}(\text{CDCl}_3)$ : 7.82 (2H), 7.72 (2H), 7.28 (1H), 7.26 (1H), 7.07 (1H), 4.0 (2H)

#### Example 3: Polymerization over an electrode

**[0034]** 0.1M of the N-hydroxyphthalimidyl 3-thiophenyl acetate having formula (III) above synthesized in Example 1 was dissolved in a solution of 0.1M of tetrabutylamine hexafluorophosphate (TBAHFP) as a dopant in acetonitrile, and polymerization of the monomer was induced over a platinum electrode using chronopotentiometry, as illustrated in FIG. 3. In particular, a platinum electrode was placed on a 0.5-mm-thick glass substrate, and polymerization of the monomer was induced at a current of 0.4 mA for 40 seconds to uniformly form an electrically conductive polymer layer on the platinum electrode.

**[0035]** This electrically conductive polymer layer of poly(N-hydroxyphthalimidyl 3-thiophenyl acetate) was observed using a scanning electron microscope. The result is shown in FIG. 4.

**[0036]** To measure the reproducibility of the electrically conductive polymer layer of poly(N-hydroxyphthalimidyl 3-thiophenyl acetate), a cyclic voltammogram was measured five times at a constant scanning rate by applying voltages across the platinum electrode in acetonitrile/TBAHFP. The result is shown in FIG. 5. As shown in FIG. 5, the poly(N-hydroxyphthalimidyl 3-thiophenyl acetate) layer according to the present invention has a nearly reversible oxidation peak at 1.0V, confirming a high electroactivity of the polymer layer. Apparently, the polymerization reaction over the electrode is highly reproducible.

**[0037]** To measure the electrical conductivity of the poly(N-hydroxyphthalimidyl 3-thiophenyl acetate) layer, a cyclic voltammogram was measured at three different scanning rates by applying voltages across the platinum electrode. The result is shown in FIG. 6A. FIG. 6B is a graph of correlation between scanning rate versus and peak current, which was obtained based on the cyclic voltammogram of FIG. 6A. As shown in FIG. 6B, the peak current of the polymer layer according to the present invention has a positive linear correlation with the scanning rate, which is indicative of good electrical conductivity of the polymer layer.

#### Example 4: Immobilization of a DNA probe and confirmation of its hybridization with a target DNA

##### 1. Immobilization of a DNA probe

**[0038]** A DNA probe was immobilized on the electrically conductive polymer layer polymerized in Example 3. 100  $\mu\text{M}$  of probe DNA

(5' -  $\text{NH}_2\text{-GTTCTTCTCATCATC-3'}$ ; SEQUENCE NO.1) with an amine group at the 5'-terminal was applied to the electrically conductive layer and reacted for about 12 hours. Immobilization of the DNA probe is achieved by the substitution



of the 5'-terminal amine group of the DNA probe for a hydroxyphtalimide group of the electrically conductive polymer. Immobilization of a protein probe can be achieved by the substitution of the amine group of lysine residue for the hydroxyphtalimide group of the electrically conductive polymer.

## 2. Hybridization with a target DNA

**[0039]** 100  $\mu$ M of complementary target DNA (5'-NH<sub>2</sub>-GATGATGAGAAGAAC-3'; SEQUENCE NO. 2) was applied to the single stranded DNA probe immobilized on the electrically conductive polymer according to the present invention and reacted for hybridization at 40°C for 3 hours. FIG. 7 illustrates the hybridization of a complementary target DNA to an immobilized probe DNA. As a control group, the single stranded DNA probe was reacted without the complementary target DNA under the same conditions. After the hybridization reaction, a peak current was measured using cyclic potentiometry to confirm hybridization. The result is shown in FIG. 8.

**[0040]** FIG. 8 is a cyclic voltammogram for two spots on an electrode coated with the electrically conductive polymer according to the present invention, one spot for the non-hybridized probe DNA (single stranded; ss) and the other spot for the probe DNA hybridized with the target DNA (double stranded; ds), which was measured to check whether hybridization has taken place or not. As shown in FIG. 8, when DNA hybridization (ds DNA) occurs, a current level at the same voltage greatly decreases. This reduction in current level of the electrically conductive polymer is attributed to a large functional group grafted thereon as a result of the hybridization.

**[0041]** To measure the sensitivity of an electrode coated with the electrically conductive polymer according to the present invention, after hybridization of the probe DNA with different concentrations of the complementary target DNA, a cyclic voltammogram was measured. Based on this cyclic voltammogram, a correlation between target DNA concentration and peak current was calculated. The result is shown in FIG. 9.

**[0042]** The sensitivity of the electrode coated with the electrically conductive polymer according to the present invention was calculated from the slope at  $x = 0$  of the graph of FIG. 9. The calculated sensitivity of the electrode was 0.62  $\mu$  A/nmole. This result indicates that a sensor employing the electrode coated with the electrically conductive polymer according to the present invention can detect a target DNA in a sample at a limit of about 1 nmole.

### Example 4: Hybridization of target DNA with a single base mismatch

**[0043]** For comparison of the hybridization of a probe DNA with a perfect match target DNA and a single base mismatch target DNA, after the immobilization of DNA probe (5'-NH<sub>2</sub>-GTTCTTCTCATCATC-3'; SEQUENCE NO. 1) on electrodes coated with the electrically conductive polymer synthesized in Example 3, target DNAs of different sequences were hybridized to the immobilized DNA of the electrodes. The target DNAs used were one perfect match ("PM") DNA, 5'-GATGATGAGAAGAAC-3', (SEQUENCE NO. 2), which perfectly matches the DNA probe, and two single base mismatch DNAs, 5'-GATGATGGGAAGAAC-3' (SEQUENCE NO. 3, "TG") and 5'-GATGATGCGAAGAAC-3' (SEQUENCE NO. 4, "TC"), which have a single non-complementary base to the sequence of the DNA probe. How sensitively and selectively the electrode according to the present invention can detect a single base mismatch was measured from the cyclic voltammograms of the samples. As a control group, a cyclic voltammogram for the non-hybridized DNA probe was measured. The ratio of peak current of each of the samples to the control group,  $I_p(ds)/I_p(ss)$ , was calculated based on the cyclic voltammograms. The results are shown in FIG. 10.

**[0044]** As shown in FIG. 10, the ratio of  $I_p(ds)/I_p(ss)$  was 52% for the perfect match target DNA, 29.3% for the single base mismatch TG, and 24.3% for the single base mismatch TC. The ratio of  $I_p(ds)/I_p(ss)$  was much smaller for the single base mismatch target DNAs than for the perfect match target DNA. This result supports that an electrode coated with the electrically conductive polymer according to the present invention can accurately detect a single base mismatch target DNA as well as a perfect match target DNA which are hybridized to a probe DNA immobilized on the electrically conductive polymer.

**[0045]** Monomers according to the present invention can be used to synthesize highly electrically conductive polymers. Electrically conductive polymers according to the present invention can be effectively used in a sensor for detecting the hybridization of a target molecule to a probe. A sensor having an electrode coated with an electrically conductive polymer according to the present invention having a high redox potential according to the present invention can detect the hybridization of a target molecule to a probe, with high selectivity. A target molecule can be rapidly detected with high sensitivity using the method according to the present invention.

**[0046]** While the present invention has been particularly shown and described with reference to exemplary embodiments thereof, it will be understood by those of ordinary skill in the art that various changes in form and details may be made therein without departing from the spirit and scope of the present invention as defined by the following claims.

55

ID No. 1)

5

<400> 2

gatgatgaga agaac

15

10

<210> 3

<211> 15

15

<212> DNA

<213> Artificial Sequence

<220>

20

<223> a target DNA which is complementary to the prove DNA (SEQ ID No.  
1) except 1 base

25

<400> 3

gatgatggga agaac

15

30

<210> 4

<211> 15

35

<212> DNA

<213> Artificial Sequence

<220>

40

<223> a target DNA which is completely complementary to the prove DNA  
(SEQ ID. 1) except 1 base

45

<400> 4

gatgatgcga agaac


15

50

55


## Claims

1. An electrically conductive polymer having formula (I) below:

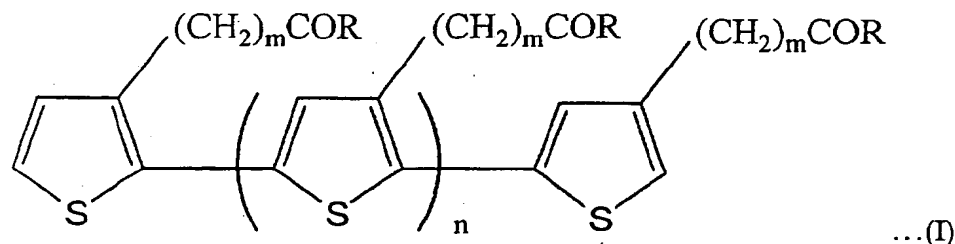

where  $m$  is 1, 2, or 3;  $R$  is a hydroxysuccinimidyl group, a hydroxyphthalimidyl group, or a pentafluorophenyl group; and  $n$  is zero or an integer.

2. An electrically conductive polymer having formula (II) below:

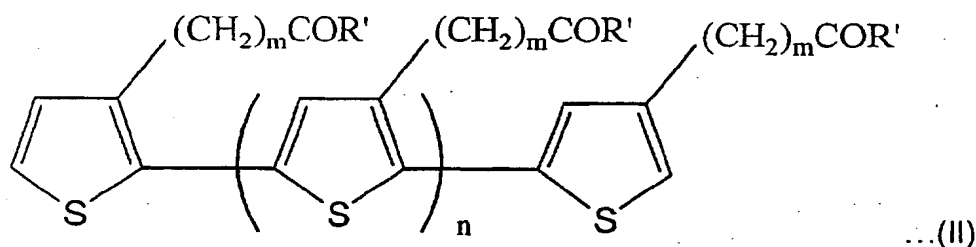

where  $m$  is 1, 2, or 3;  $R'$  is a hydroxysuccinimidyl group, a hydroxyphthalimidyl group, a pentafluorophenyl group, or a probe group, wherein at least one  $R'$  is a probe group; and  $n$  is zero or an integer.

3. The electrically conductive polymer of claim 2, wherein the probe group is a nucleic acid or a protein.
4. The electrically conductive polymer of claim 3, wherein the probe group is selected from the group consisting of a DNA, a RNA, a PNA, an antibody, an antigen, an enzyme, a substrate, and a cofactor.
5. N-hydroxyphthalimidyl 3-thiophenyl acetate or 3-pentafluorophenyl 3-thiophenyl acetate.
6. An electrode coated with the electrically conductive polymer of claim 1 or 2.
7. A sensor employing an electrode coated with the electrically conductive polymer of claim 1 or 2.
8. A method for detecting a target molecule, comprising:
  - (a) providing the electrically conductive polymer of claim 1 on a substrate through electrical polymerization;
  - (b) immobilizing a probe to the surface of the electrically conductive polymer;
  - (c) contacting a sample containing a target molecule, which is capable of specifically reacting with the probe, to hybridize with the probe; and
  - (d) detecting the target molecule by measuring a voltage or current variation in the electrically conductive polymer.
9. A method for detecting a target molecule, comprising:

(a) providing the electrically conductive polymer of claim 2 on a substrate through electrical polymerization;  
(b) contacting a sample containing a target molecule, which is capable of specifically reacting with the probe, to hybridize with the probe bonded to the electrically conductive polymer; and  
(c) detecting the target molecule by measuring a voltage or current variation in the electrically conductive polymer.

10. The method of claim 8 or 9, wherein the conductive substrate is a gold electrode or a platinum electrode.

11. The method of claim 8 or 9, wherein the probe is selected from the group consisting of a DNA, a RNA, a PNA, an antibody, an antigen, an enzyme, a substrate, and a cofactor.

12. The method of claim 8 or 9, wherein the target molecule is a nucleic acid or a protein.

FIG. 1

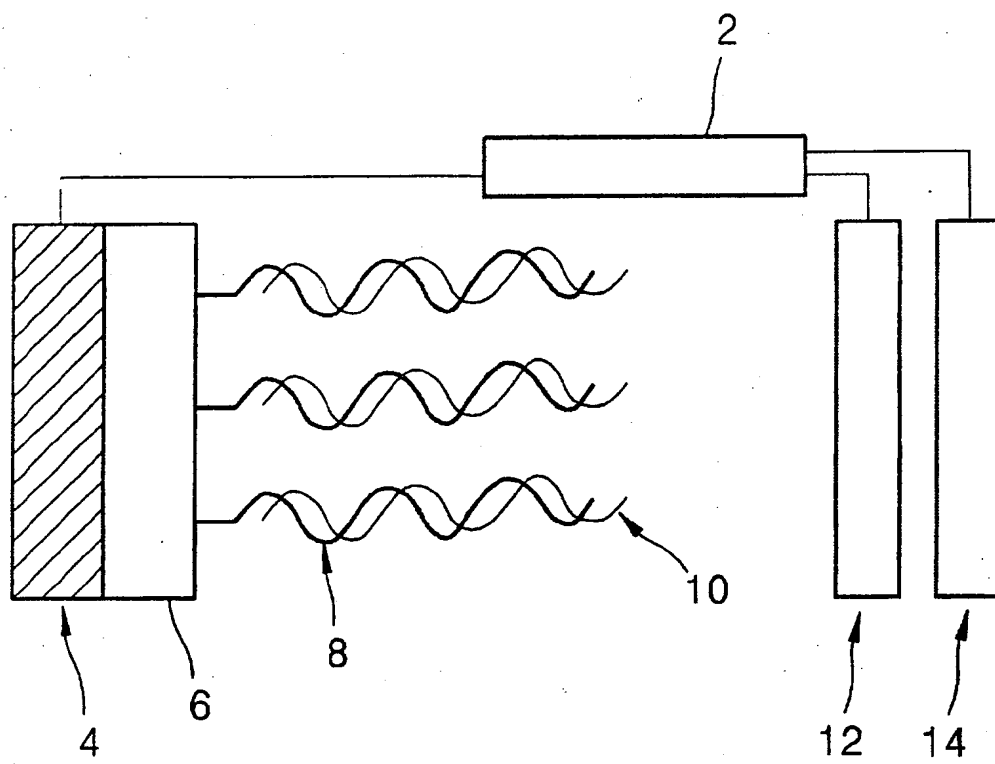


FIG. 2

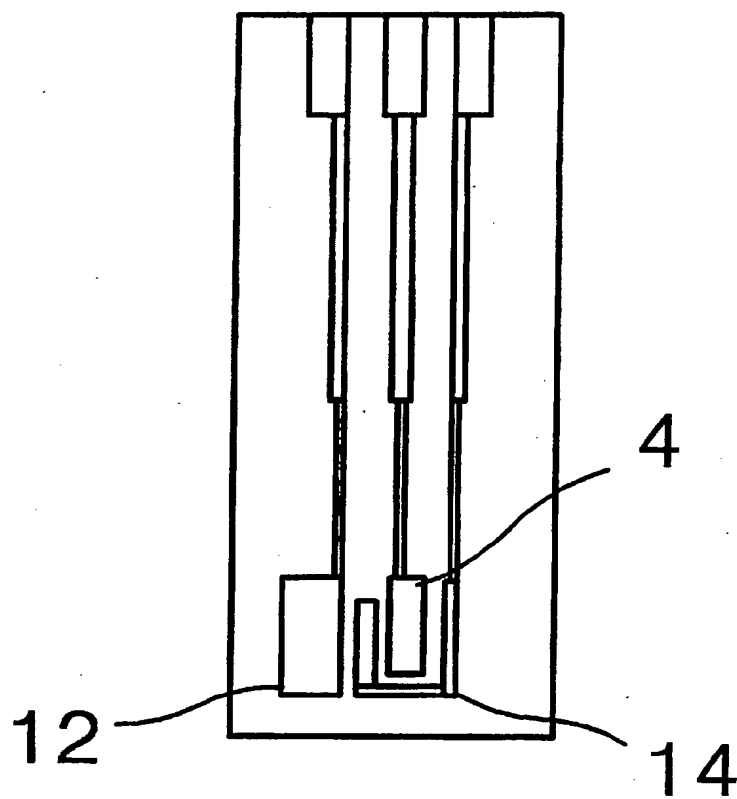


FIG. 3

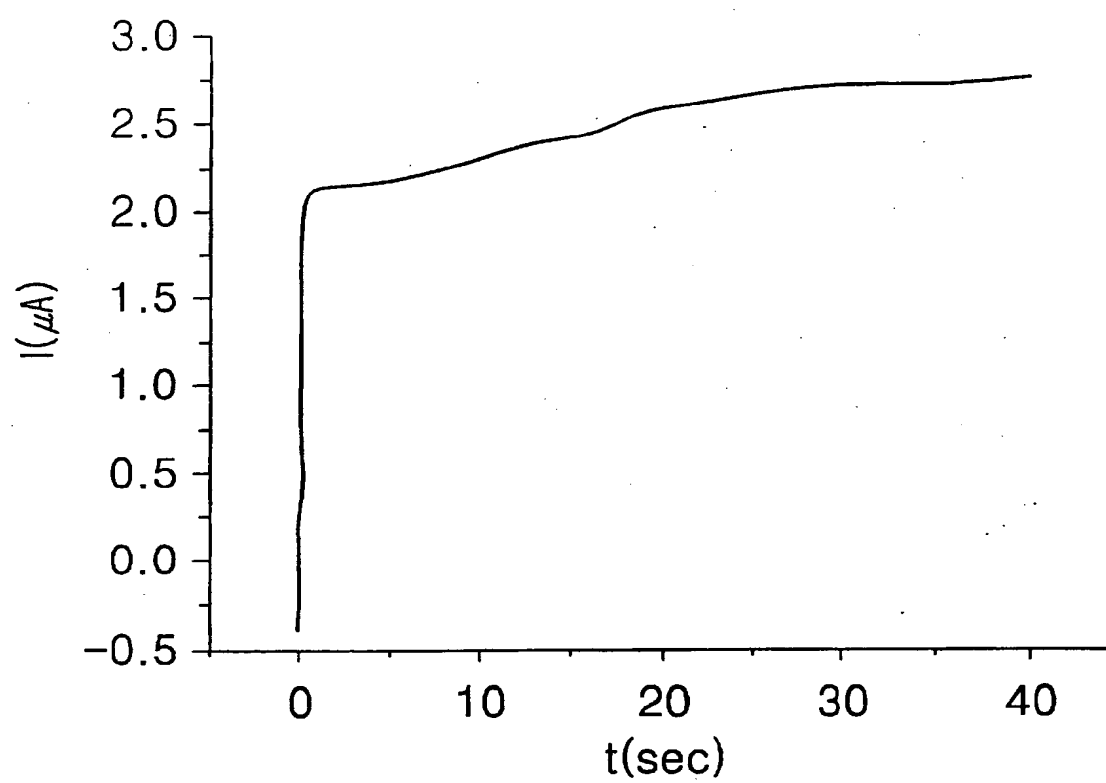




FIG. 4

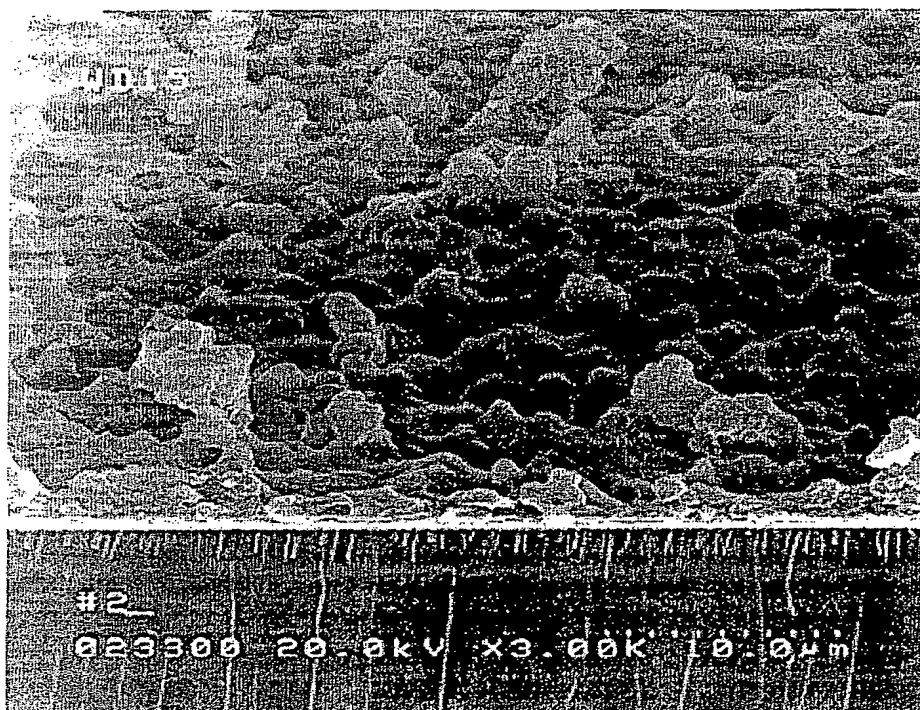


FIG. 5

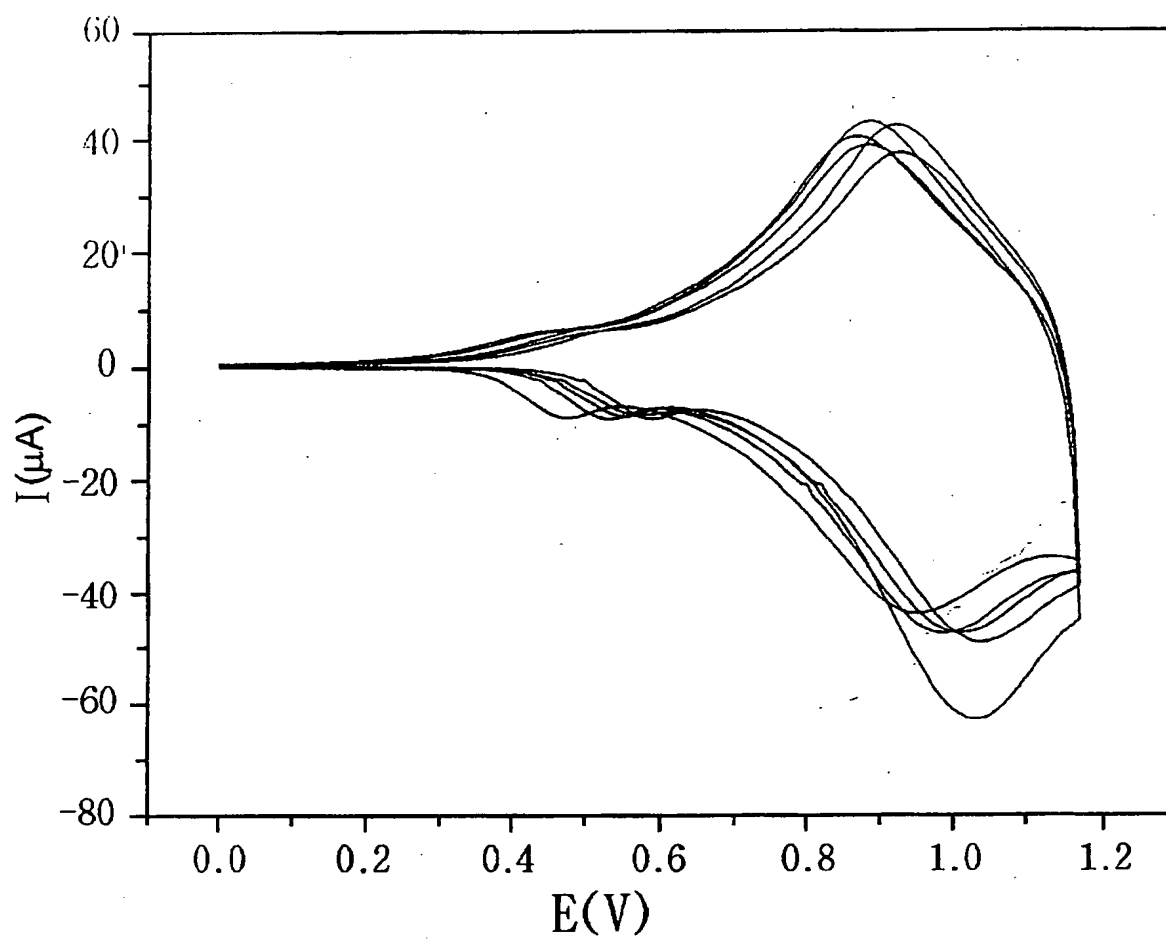


FIG. 6A

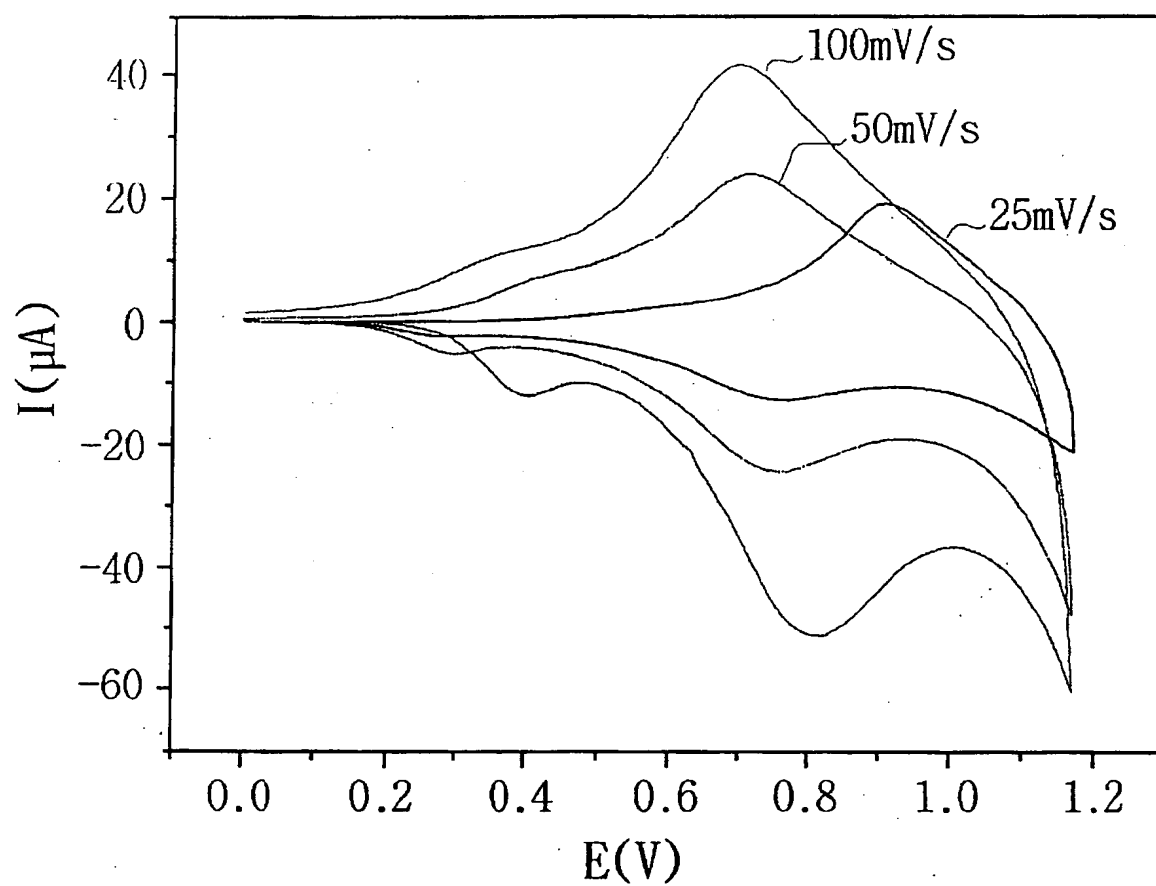


FIG. 6B

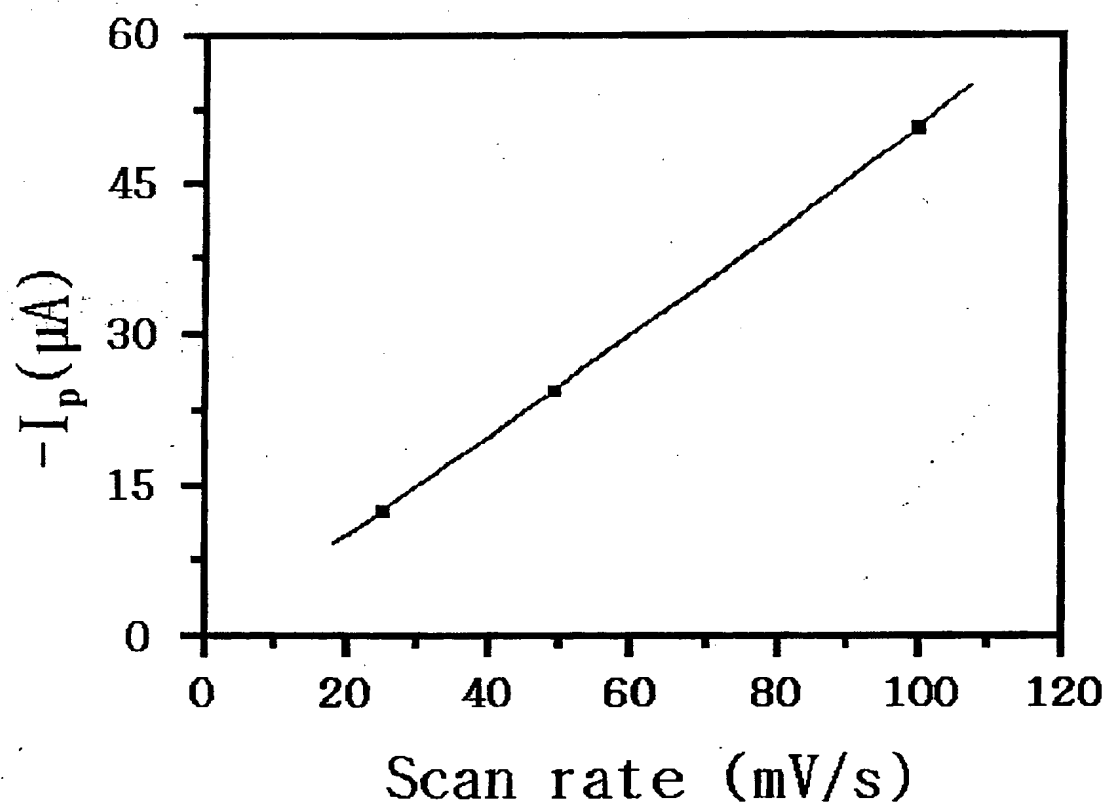


FIG. 7

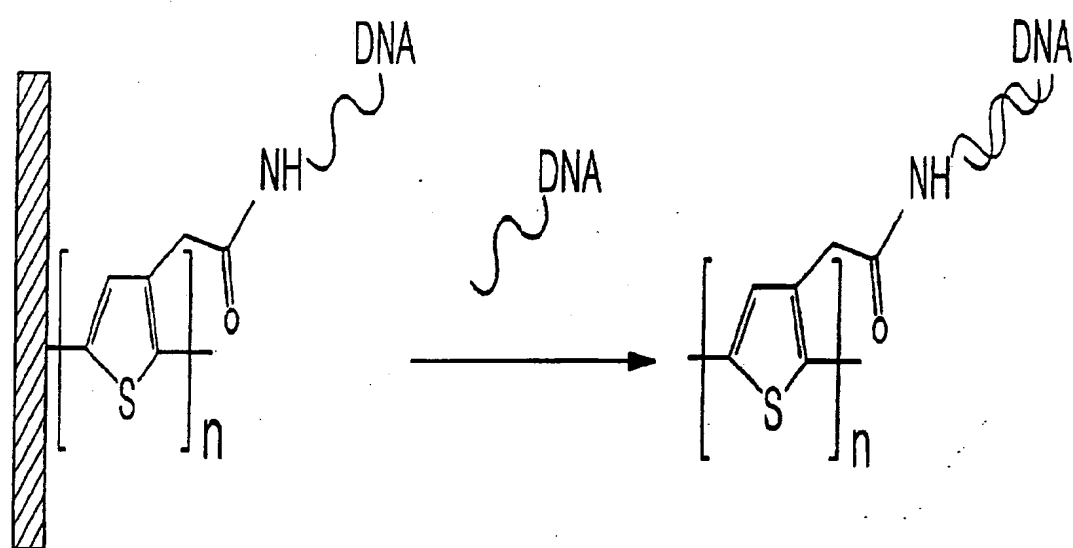


FIG. 8

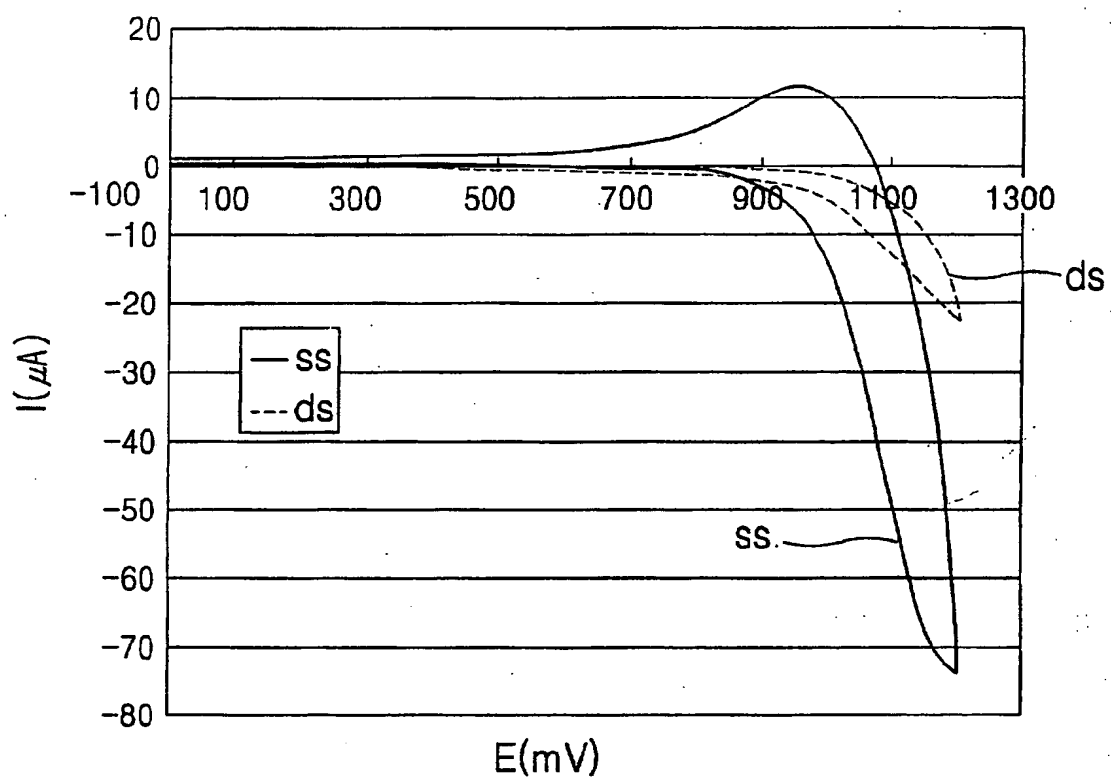


FIG. 9



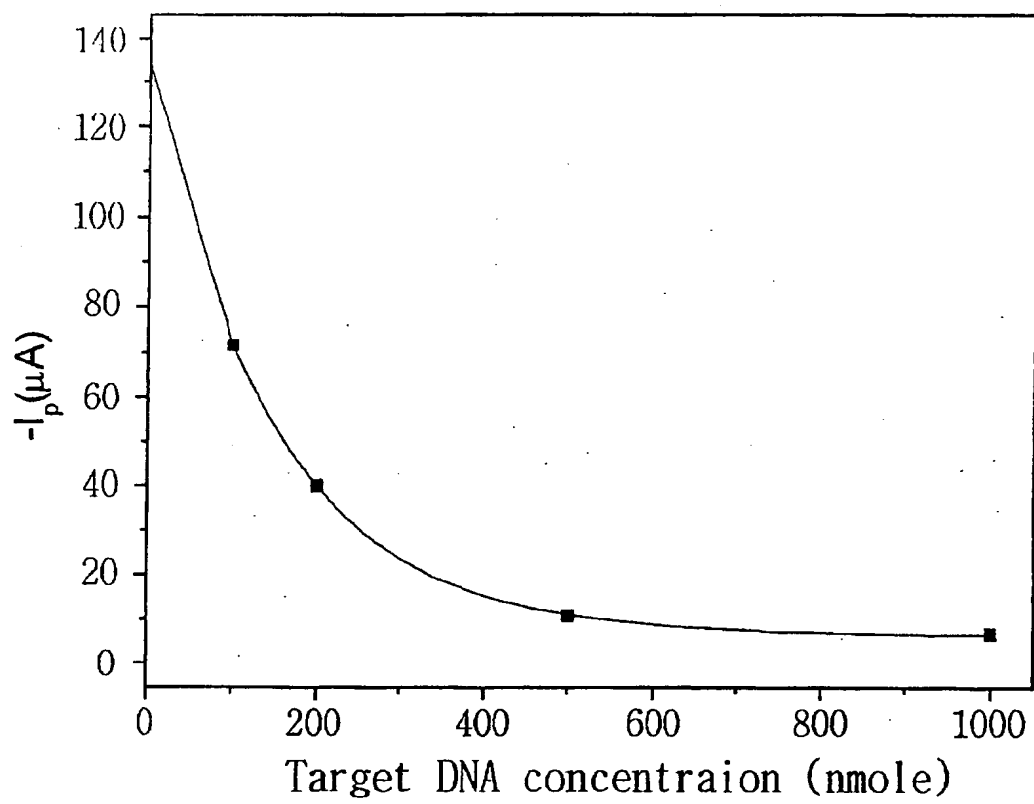


FIG. 10



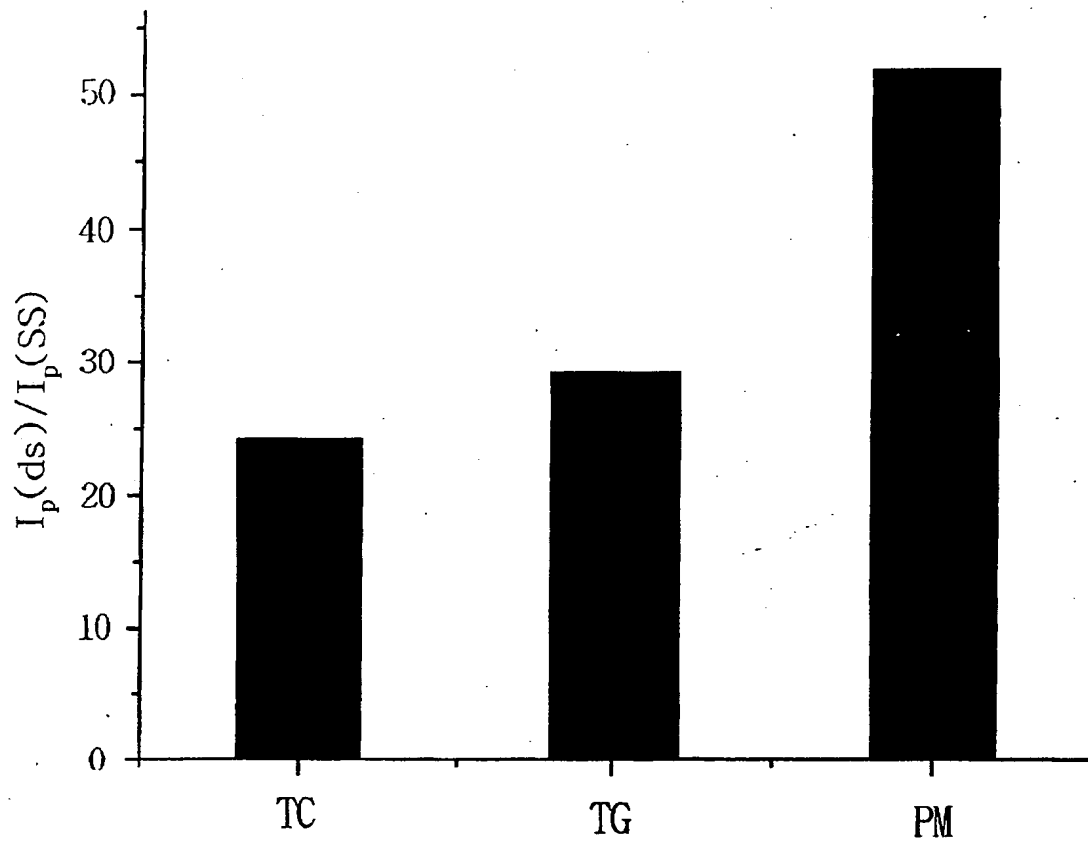



Europäisches Patentamt  
European Patent Office  
Office européen des brevets



(11) **EP 1 347 463 A3**

(12)

## EUROPEAN PATENT APPLICATION

(88) Date of publication A3:  
12.05.2004 Bulletin 2004/20

(51) Int Cl.7: **H01B 1/12, C12Q 1/68,**  
**G01N 33/53**

(43) Date of publication A2:  
24.09.2003 Bulletin 2003/39

(21) Application number: 03004957.1

(22) Date of filing 10.03.2003

(84) Designated Contracting States:  
**AT BE BG CH CY CZ DE DK EE ES FI FR GB GR**  
**HU IE IT LI LU MC NL PT RO SE SI SK TR**  
Designated Extension States:  
**AL LT LV MK RO**

- Choi, Young  
Kiheung-eub, Yongin-city, Kyungki-do (KR)
- Han, Jung-im  
Seoul (KR)
- Lim, Geun-bae, 1053-2 Youngtong-dong  
Paldal-gu, Suwon-city, Kyungki-do (KR)

(30) Priority: 09.03.2002 KR 2002012729  
07.02.2003 KR 2003007757


(71) Applicant: **SAMSUNG ELECTRONICS CO., LTD.**  
Suwon-City, Kyungki-do (KR)

(74) Representative: **Grünecker, Kinkeldey,**  
**Stockmair & Schwanhäusser Anwaltssozietät**  
Maximilianstrasse 58  
80538 München (DE)

(72) Inventors:  
• Cha, Jun-hoe  
Yongin-city, Kyungki-do (KR)

(54) **Novel electrically conductive polymer, sensor using the same, and method for detecting target molecule using the sensor**


(57) A novel electrically conductive polymer, a sensor using the electrically conductive polymer, and a method for detecting a target molecule that hybridizes to a probe, using the sensor, are provided. The electrically conductive polymer has the following formula:

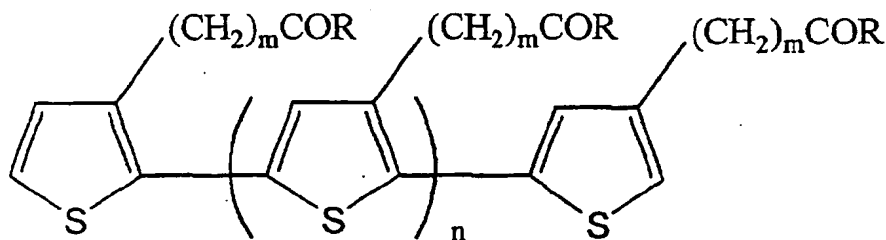

where  $m$  is 1, 2, or 3;  $R$  is a hydroxysuccinimidyl group, a hydroxyphthalimidyl group, or a pentafluorophenolyl group; and  $n$  is zero or an integer.

EP 1 347 463 A3

FIG. 1

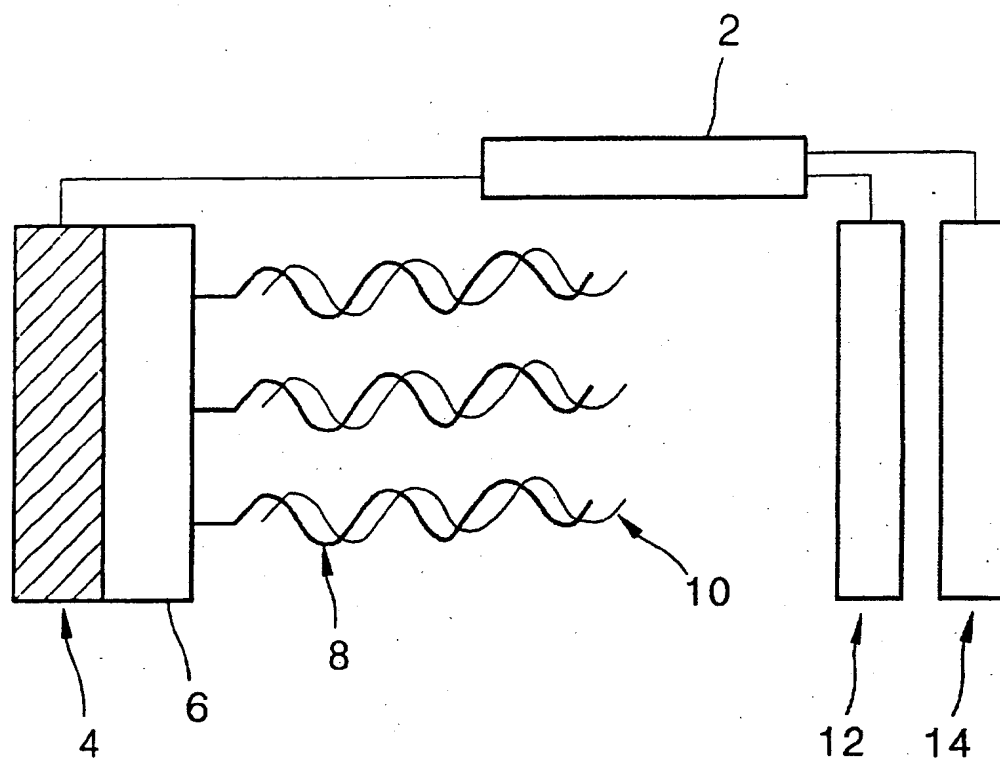



European Patent  
Office

## EUROPEAN SEARCH REPORT

Application Number  
EP 03 00 4957

DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (Int.Cl.7)
X	LI G ET AL: "REACTIVE GROUPS ON POLYMER COATED ELECTRODES, 8. NOVEL CONDUCTING POLYMER INTERFACES PRODUCED BY ELECTROCHEMICAL COPOLYMERIZATION OF FUNCTIONALIZED THIOPHENE ACTIVATED ESTERS WITH 3-METHYLTHIPHENE" MACROMOLECULAR CHEMISTRY AND PHYSICS, WILEY VCH, WEINHEIM, DE, vol. 199, no. 10, 1 October 1998 (1998-10-01), pages 2255-2266, XP000787914 ISSN: 1022-1352 * the whole document *	1-12	H01B1/12 C12Q1/68 G01N33/53
A	HILLER M ET AL: "AMPEROMETRIC BIOSENSORS PRODUCED BY IMMOBILIZATION OF REDOX ENZYMES AT POLYTHIOPHENE-MODIFIED ELECTRODE SURFACES" ADVANCED MATERIALS, VCH VERLAGSGESELLSCHAFT, WEINHEIM, DE, vol. 8, no. 3, 1 March 1996 (1996-03-01), pages 219-222, XP000558248 ISSN: 0935-9648 * the whole document *	1-12	<div>TECHNICAL FIELDS SEARCHED (Int.Cl.7)</div> H01B C12Q G01N
A	WO 00 31750 A (BIO MERIEUX) 2 June 2000 (2000-06-02) * claims 15,22 *	1-12	
The present search report has been drawn up for all claims			
Place of search <b>THE HAGUE</b>		Date of completion of the search <b>18 March 2004</b>	Examiner <b>Lehnert, A</b>
<div>CATEGORY OF CITED DOCUMENTS</div> <div>           X : particularly relevant if taken alone            Y : particularly relevant if combined with another document of the same category            A : technological background            O : non-written disclosure            P : intermediate document         </div> <div>           T : theory or principle underlying the invention            E : earlier patent document, but published on, or after the filing date            D : document cited in the application            L : document cited for other reasons            &amp; : member of the same patent family, corresponding document         </div>			

EPO FORM 1503 03.02 (P/4/001)

ANNEX TO THE EUROPEAN SEARCH REPORT  
ON EUROPEAN PATENT APPLICATION NO.

EP 03 00 4957

This annex lists the patent family members relating to the patent documents cited in the above-mentioned European search report. The members are as contained in the European Patent Office EDP file on  
The European Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

18-03-2004

Patent document cited in search report	Publication date	Patent family member(s)	Publication date	
WO 0031750	A	02-06-2000	CA 2351479 A1	02-06-2000
			EP 1138048 A1	04-10-2001
			WO 0031750 A1	02-06-2000
			JP 2002530519 T	17-09-2002

**This Page is Inserted by IFW Indexing and Scanning  
Operations and is not part of the Official Record**

**BEST AVAILABLE IMAGES**

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

- ☐ BLACK BORDERS
- ☐ IMAGE CUT OFF AT TOP, BOTTOM OR SIDES
- ☐ FADED TEXT OR DRAWING
- ☐ BLURRED OR ILLEGIBLE TEXT OR DRAWING
- ☐ SKEWED/SLANTED IMAGES
- ☐ COLOR OR BLACK AND WHITE PHOTOGRAPHS
- ☐ GRAY SCALE DOCUMENTS
- ☐ LINES OR MARKS ON ORIGINAL DOCUMENT
- ☐ REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY
- ☐ OTHER: \_\_\_\_\_

**IMAGES ARE BEST AVAILABLE COPY.**

**As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.**